




CHARACTERISTIC

Keno Sp. z o.o. is pleased to present you a solution for use on all tiled roofs. This design is characterized by a wide range of handles, each of which has many adjustments.

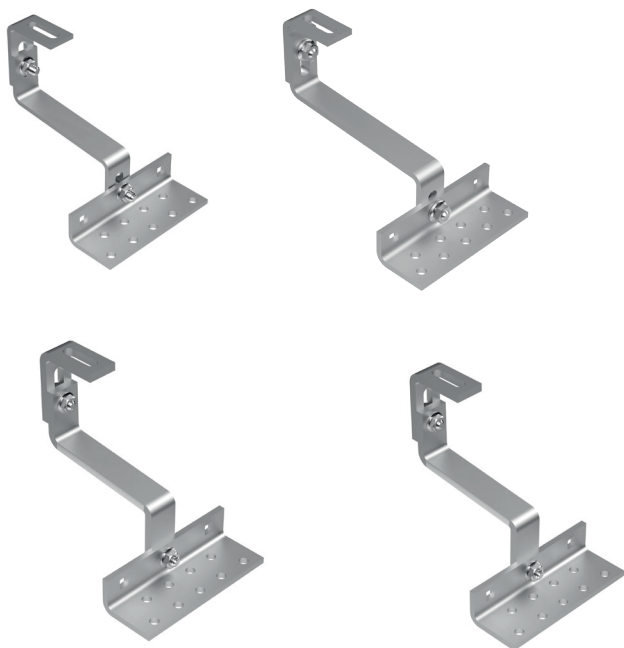

- EASY AND QUICK INSTALLATION
- INCREASED MOBILITY THANKS TO FIVE-POINT ADJUSTMENT
- COMPATIBILITY WITH MOST ROOF TILES

[SEE
CATALOG](#)

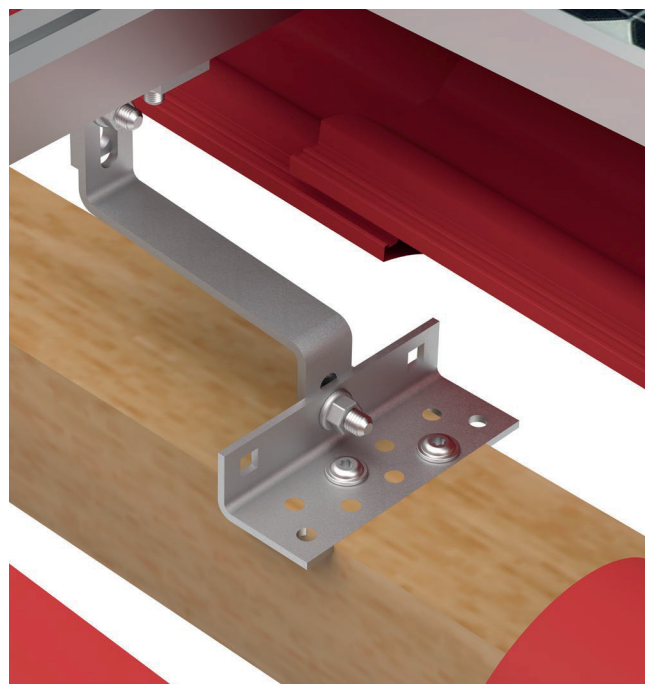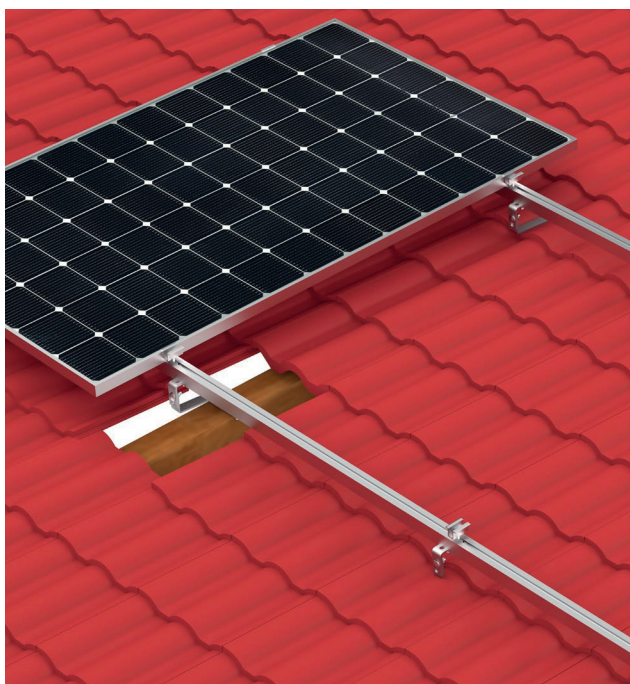

DESCRIPTION OF THE CONSTRUCTION ON A SLOPING ROOF, COVERED WITH A TILE

The hook has been manufactured with the utmost precision and quality. Keno sp. z o.o. provides a 10-year warranty on the above-mentioned structure, with the option of extending it by an additional 5 years, due to the use of zinc-magnesium coated steel. This coating increases the hook's resistance to atmospheric conditions.



The bracket is mounted by fastening it to the roof rafters with a minimum of two screws equipped with a specially designed wood thread. Thanks to the triple adjustment system, the hook can be adapted to most standard roof tiles available on the market.

The hook is compatible with all mounting profiles offered by Keno sp. z o.o. Installation of the hook with the profile is carried out using a "T-bolt," which enables fixing the hook at any point along the profile.

K-12 HOOKS

K-12	K-12-L	K-12+3
SCOPE: 0-120 mm	SCOPE: 120-150 mm	SCOPE: 30 mm

TECHNICAL DRAWING

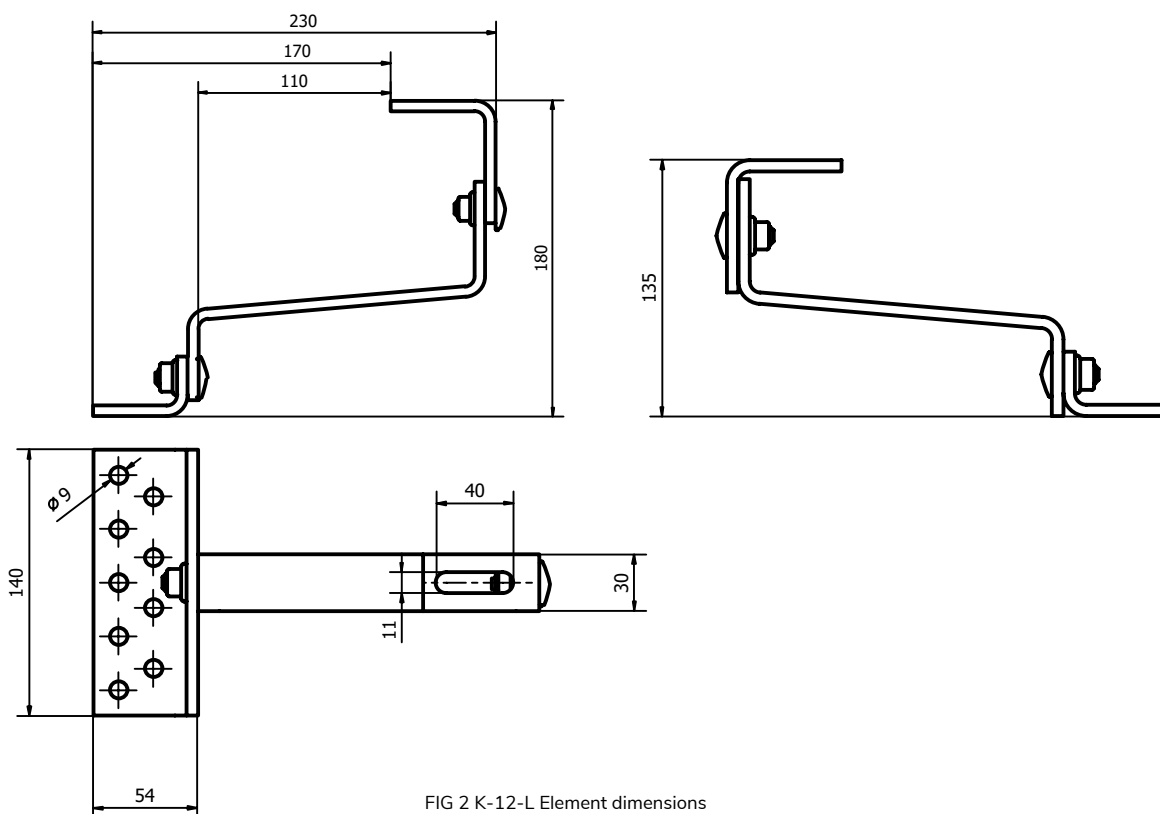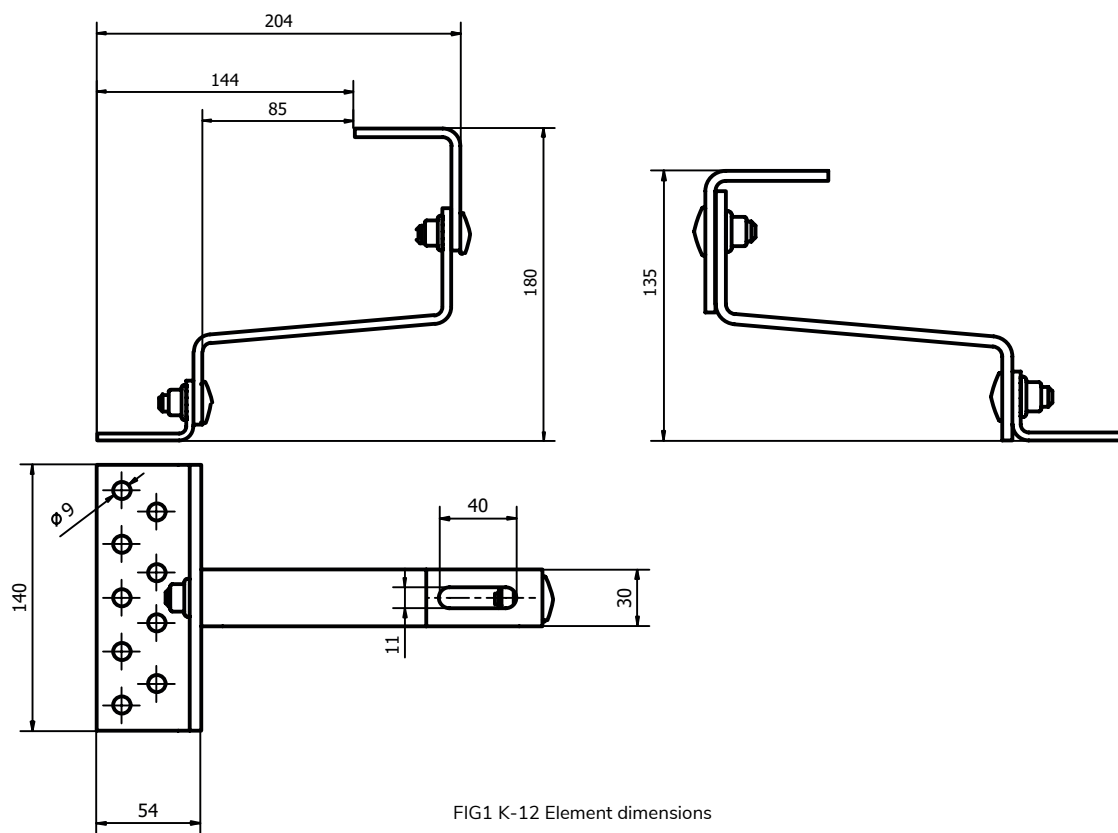

CONSTRUCTION ON A SLOPING ROOF,
COVERED WITH TILES – ADJUSTABLE

