

CHARACTERISTICS

Keno sp. z o.o. is pleased to present a solution for flat roofs using mounting triangles adapted for mounting clamps on the longer and shorter sides of the module.



- SIMPLE AND QUICK INSTALLATION
- INSTALLATION OF CLAMPS ON A LONGER OR SHORTER MODULE FRAME
- FOR SCREWED, BALLAST AND WELDED CONSTRUCTIONS
- CLICK-TYPE CLAMPS SPEED UP THE INSTALLATION PROCESS
- ANGLE OF INCLINATION 10 OR 15 DEGREES
- COMPATIBILITY WITH A WIDE RANGE OF MONOFACIAL AND BIFACIAL MODULES

[VIEW
CATALOGUE](#)



DESCRIPTION OF THE STRUCTURE USING KENO MAX ASSEMBLY TRIANGLES

Keno sp. z o.o. provides a 10-year warranty for the above structure, with the possibility of extending it for another 5 years, due to the fact that it is made of components that have all the required certificates. The mounting triangle with a channel section has a wide range of applications - installation is carried out by loading the structure with ballast, screwing it into the roof surface or connecting it to a welded structure. The structure is delivered to the installation site in a "disassembled" state, which facilitates its transport. The element is coated with zinc and magnesium.

THE DESIGN IS SPECIFICALLY FOR MODULES WITH A WIDTH OF 1134 TO 1140MM.



Pic. 1 Mounting clamps on the shorter frame of the module



Pic. 2 Assembly with welded plate




Pic. 3 Installation on trapezoidal sheet metal




Pic. 4 Construction with windshield


TECHNICAL DRAWING

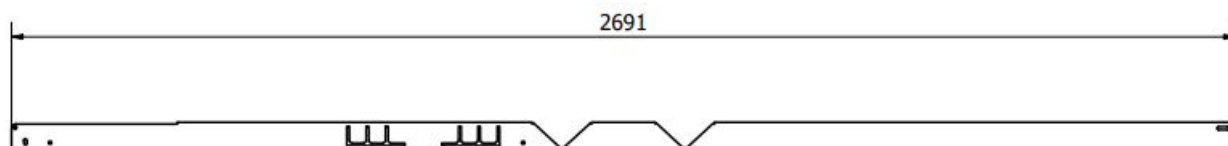


Pic. 5 Component spread out for 10 degrees

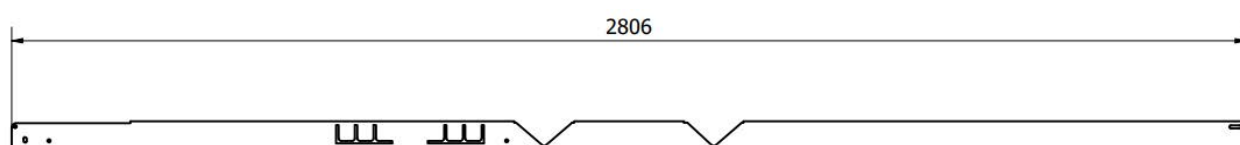

Pic. 6 Component spread out for 15 degrees

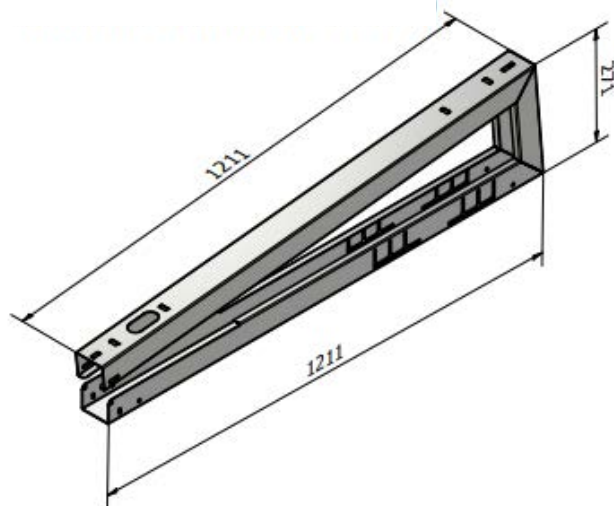

Pic. 7 Component after assembly for 10 degrees

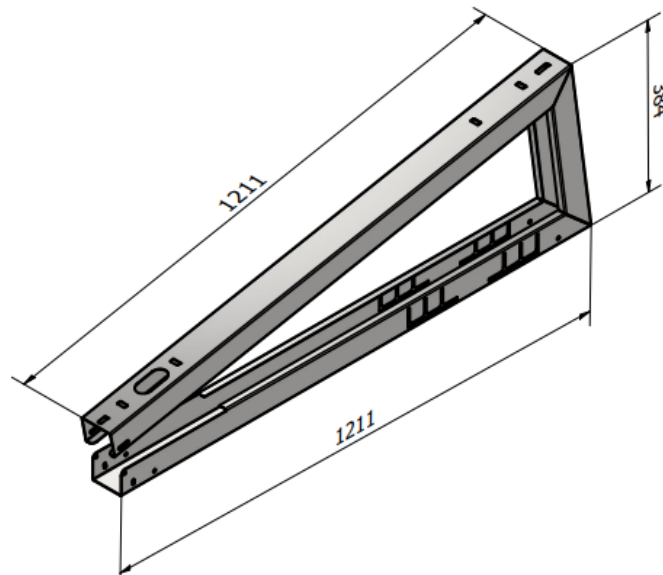

Pic. 8 Component after assembly for 15 degrees