



TWMNF

N-type Half-cell
Bifacial Module(66)

66HD720-740W

High Power Output
Low LCOE




Maximum Power
740W+



<https://en.tongwei.cn/>



TIER 1
Bloomberg
NEW ENERGY FINANCE



Utility-scale
PV Plants



12
YEAR
Materials
Warranty




30
YEAR
Power
Warranty



Learn More

Drawings (Unit: mm)

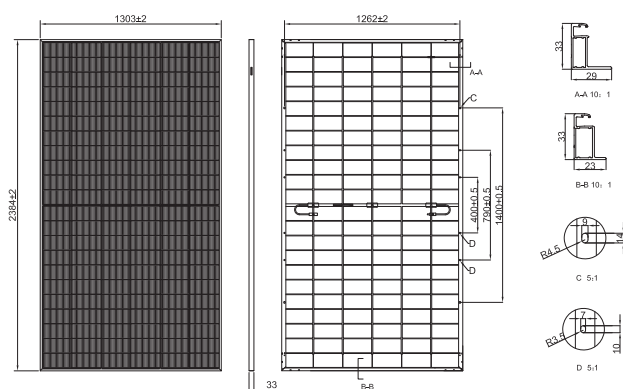

Electrical Characteristics (STC)

Moduel type: TWMNF-66HDXXX

Maximum Power: Pmax [W]	720	725	730	735	740
Open Circuit Voltage: Voc [V]	49.28	49.45	49.55	49.65	49.80
Short Circuit Current: Isc [A]	18.55	18.60	18.68	18.75	18.81
Voltage at Maximum Power: Vmp [V]	41.03	41.20	41.37	41.53	41.69
Current at Maximum Power: Imp [A]	17.55	17.60	17.65	17.70	17.75
Module Efficiency: η [%]	23.2	23.3	23.5	23.7	23.8

* STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Electrical Characteristics (NMOT)

Maximum Power: Pmax [W]	541	545	549	553	556
Open Circuit Voltage: Voc [V]	46.82	46.98	47.07	47.17	47.31
Short Circuit Current: Isc [A]	14.98	15.02	15.08	15.14	15.19
Voltage at Maximum Power: Vmp [V]	38.18	38.36	38.53	38.70	38.80
Current at Maximum Power: Imp [A]	14.17	14.21	14.25	14.29	14.33

* NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM=1.5, Wind Speed 1m/s

Electrical characteristics with different rear side power gain

5%	Maximum Power: Pmax[W]	756	761	766	771	777
	Module Efficiency: η [%]	24.3	24.5	24.7	24.8	25.0
15%	Maximum Power: Pmax[W]	828	833	839	845	851
	Module Efficiency: η [%]	26.7	26.8	27.0	27.2	27.4
25%	Maximum Power: Pmax[W]	900	906	912	918	925
	Module Efficiency: η [%]	29.0	29.2	29.4	29.6	29.8

Temperature Rating

Temperature Coefficient of Pmax	-0.28%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	+0.046%/°C
NMOT	45±2°C


Operating Parameters

Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	35A
Power Output Tolerance	0~+3%
Bifaciality	80±5%


Mechanical Parameters

Cells	TNC(N Type Monocrystalline Cell)
Cell Orientation	132[6×22]
Dimension	2384±2×1303±2×33mm
Weight	36.9kg
Front Glass	2.0mm AR coated heat strengthened glass
Rear Glass	2.0mm heat strengthened glass
Frame	Anodized aluminum alloy frame
Junction Box	IP68, 3 diodes
Output Cable	4.0mm ²
Cable Length	+400mm, -200mm or±1400mm,length can be customized
Wind/Snow Load	2400Pa/5400Pa
Packaging	33pcs per pallet, 594pcs per 40'HC

Warranty

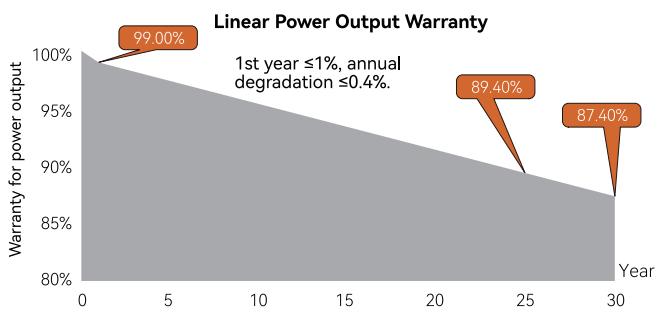

I-V Curve

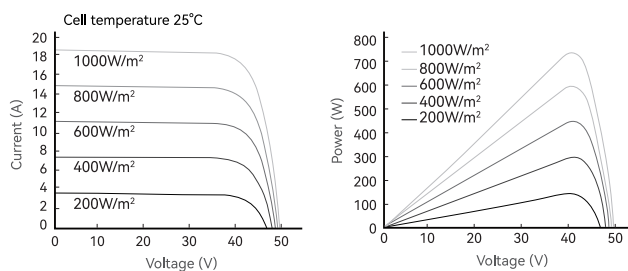

Certifications

Quality Management System and Product Certification

ISO 9001: 2015/Quality management system
ISO 14001: 2015/Environmental management system
ISO 45001: 2018/Occupation health safety management system
ISO 50001: 2018/Energy management system
IEC 62941: 2019/Quality system for PV module manufacturing
IEC 61215/61730, IEC 62804(PID), IEC 61701(Salt),
IEC 62716 (Ammonia), IEC 60068-2-68(Sand)



Email: sales@tongwei.com Website: https://en.tongwei.cn/ Add: No.588, Middle Section Tianfu Avenue, High-Tech Zone, Chengdu, China (Sichuan) Pilot Free Trade Zone Tel: +86-028-60707985

Statement: With technological process and product update, there maybe deviation between the technical parameters of Tongwei's module products and the technical parameters contained in the specification, and Tongwei Solar has the right to adjust the technical parameters at any time without notifying the customer, the final interpretation of the technical specification is vested in Tongwei Solar. (TNC2.0-Preview-20250123)